


SOCKET LOW HEAD CAPSCREWS (METRIC) - DIN 7984

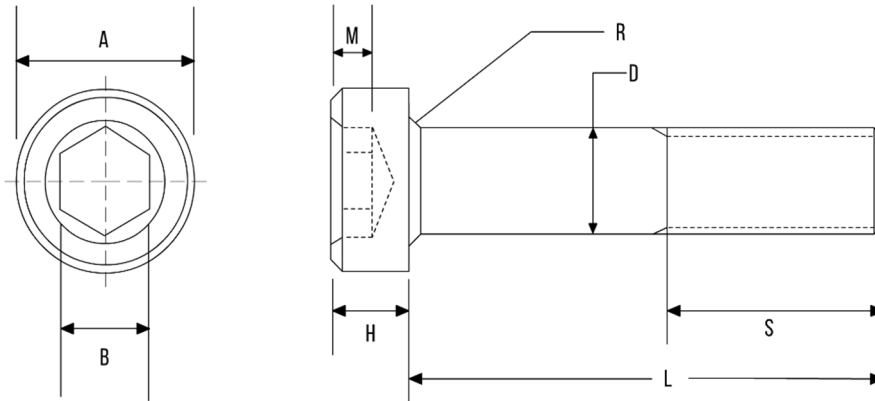

DIA	A	H	B	M	S (MIN)	R (MIN)
M3	5.32 - 5.50	1.86 - 2.00	2.020 - 2.080	1.38 - 1.62	12	0.10
M4	6.78 - 7.00	2.66 - 2.80	2.520 - 2.580	2.18 - 2.42	14	0.20
M5	8.28 - 8.50	3.32 - 3.50	3.020 - 3.080	2.58 - 2.82	16	0.20
M6	9.78 - 10.00	3.82 - 4.00	4.020 - 4.095	2.88 - 3.12	18	0.25
M8	12.73 - 13.00	4.82 - 5.00	5.020 - 5.140	3.65 - 3.95	22	0.40
M10	15.73 - 16.00	5.82 - 6.00	7.025 - 7.175	4.35 - 4.65	26	0.40
M12	17.73 - 18.00	6.78 - 7.00	8.025 - 8.175	4.85 - 5.15	30	0.60
M14	20.67 - 21.00	7.78 - 8.00	10.025 - 10.175	5.15 - 5.45	34	0.60
M16	23.67 - 24.00	8.78 - 9.00	12.032 - 12.212	5.35 - 5.65	38	0.60
M18	26.67 - 27.00	9.78 - 10.00	12.032 - 12.212	6.32 - 6.68	42	0.60
M20	29.67 - 30.00	10.73 - 11.00	14.032 - 14.212	7.32 - 7.68	46	0.80

- Dimensions in millimetres
- Available in Grades 10.9 Steel
- Other materials manufactured on request